

VARIOVAC

simpler faster better

VARIOVAC Variotrack Eco




VARIOTRACK

Line Converger

VARIOTRACK

The line converger combines multiple product lanes into a single lane. This simplifies and increases the efficiency of automation in subsequent process steps, such as metal detection or checkweighing of individual packages. The VARIOTRACK can be configured for various applications and performance requirements and can be easily adjusted to different package sizes with just a few simple steps — the perfect complement to your VARIOVAC thermoforming machine.

VARIOTRACK ECO 2.0

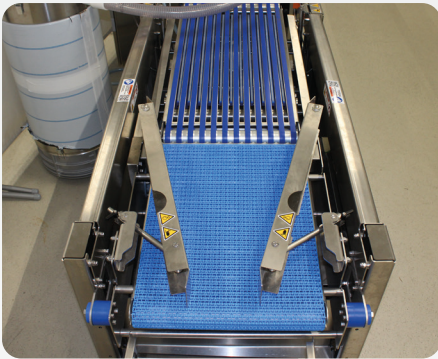

TECHNICAL DATA

- Size (LxW): 1605 mm x 831 mm
- Frame width: 360 mm, 460 mm
- Film width: 320 mm – 460 mm
- Lanes: 1 to 4

VERSION 1: SOFTWARE-INTEGRATED

Compatible with VARIOVAC thermoforming machines

- Electrical and pneumatic supply provided by the VARIOVAC thermoforming machine
- Control and recipe management via the thermoforming machine's control panel
- Infeed-side control panel with emergency stop and jog button

VERSION 2: INDEPENDENT (STAND-ALONE)

Suitable for use with all VARIOVAC thermoforming machines and machines from other manufacturers


- Control via an operator panel mounted on the VARIOTRACK in VARIOVAC design
- External compressed air and power supply
- Dedicated recipe management via the integrated control panel
- Infeed-side control panel with emergency stop and jog button

BENEFITS:

- Robust, simple frame construction
- Individual separation even with geometrically complex packages
- Integrated height and tilt adjustment on the separation conveyor, plus continuously adjustable machine feet
- Equipped with infeed monitoring

Reliable transport of packages for efficient production!

VARIOTRACK C60

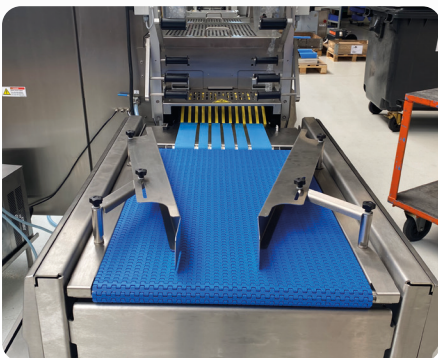

TECHNICAL DATA

- Size (LxW): 1716 mm x 600 mm
- Frame width: 360 mm, 460 mm
- Film width: 320 mm – 460 mm
- Lanes: 1 to 4

VERSION: SOFTWARE-INTEGRATED

Only compatible with the VARIOVAC Optimus thermoforming machine

- Chain speed, compressed air and power supply, as well as emergency stop switch synchronized with the Optimus thermoforming machine

BENEFITS:

- Robust, simple frame construction in VARIOVAC design
- Replaces the conveyor belt of the Optimus thermoforming machine
- Integrated height and tilt adjustment on the separation conveyor, plus continuously adjustable machine feet
- Lane change from 1 to 4 via button selection on the VARIOTRACK
- Process-optimized monitoring of downstream devices

More Information. More VARIOVAC.
www.variovac.de

VARIOVAC PS SystemPack GmbH
Ernst-Litfaß-Str. 3 and 5
19246 Zarrentin am Schaalsee

Phone +49 (0) 38851-823 0
sales@variovac.de · www.variovac.de

